

Type TJL2.5 Tilt Jib (Long)




The type TJL2.5 Tilt Jib (Long) is the most versatile Forklift Jib attachment in our range, allowing extra height to 2.48 metres, with a 3.58 metre reach when fully extended. This slip-on attachment is held to the Forklift by a safety chain. The Jibs overall length when closed is 2.15 metres.

The standard finish on the type TJL2.5 Tilt Jib (Long) is Zinc Plated.


SPECIFICATIONS:

- Safe Working Load (SWL) 2500kg Max.
- Unit Weight 180kg
- Load Centre 1005mm
- Pocket Size 165 x 65
- Pocket Centres 337 mm
- Horizontal C of G 1010mm
- Vertical C of G 225mm

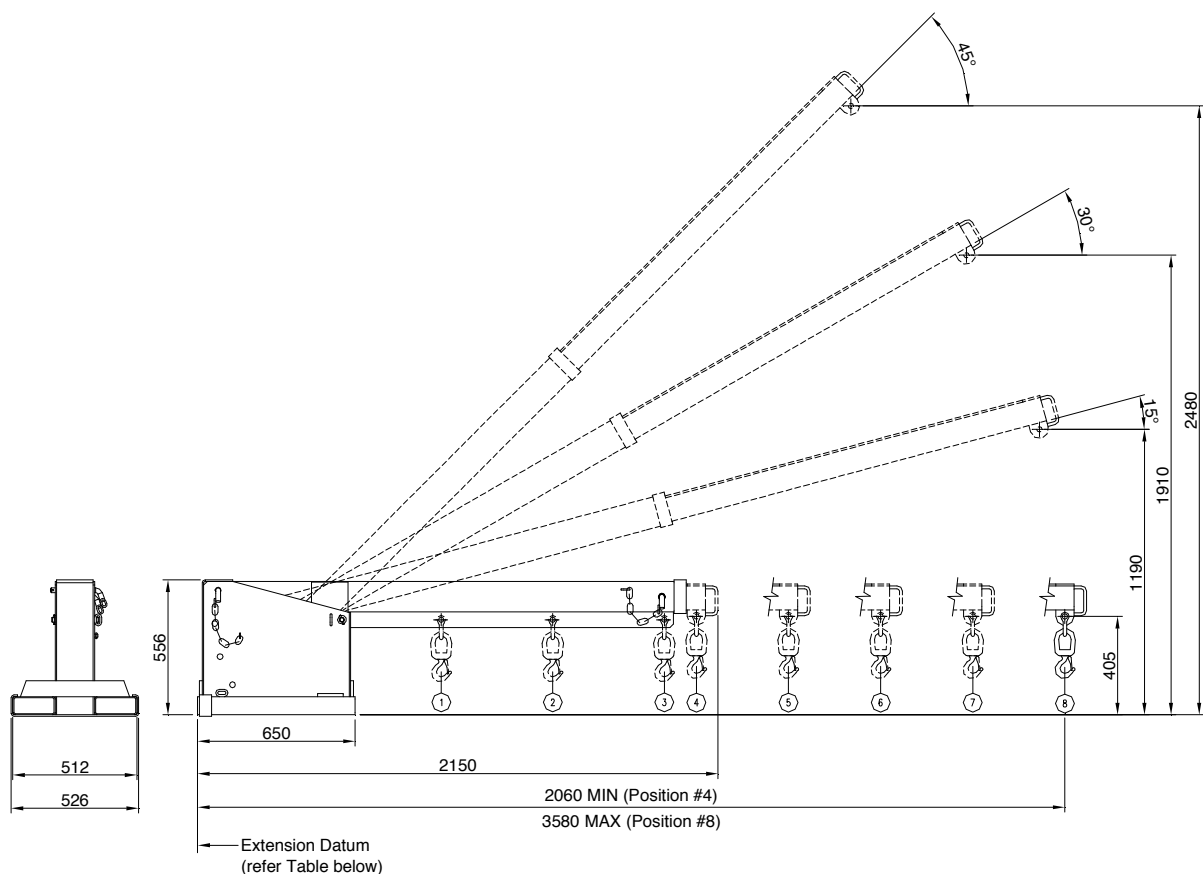

SAFE WORKING LOADS (SWL) PER POSITION								
POSITION	1	2	3	4	5	6	7	8
EXTENSION (mm)	1005	1465	1925	2060	2440	2820	3200	3580
SWL (kg)	2500	2500	1900	1650	1250	650	380	240

Type TJCL45 Tilt Jib (Long)

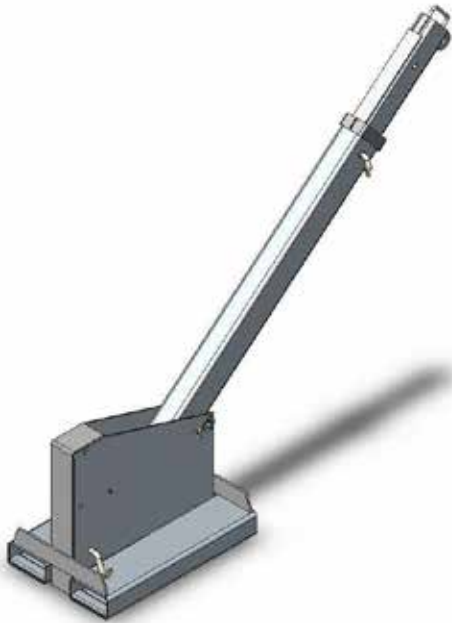


The type TJCL45 Tilt Jib (Long) is one of our most versatile Forklift Jib attachments in our range, allowing extra height to 2.23 metres, with a 3.53 metre reach when fully extended. This slip-on attachment is held to the Forklift by a safety chain. The Jibs overall length when closed is 2.1 metres.

The standard finish on the type TJCL45 Tilt Jib (Long) is Zinc Plated.

SPECIFICATIONS:

- Safe Working Load (SWL) 4500kg Max.
- Unit Weight 190kg
- Load Centre 770mm
- Pocket Size 185 x 68mm
- Pocket Centres 322 mm
- Horizontal C of G 1080mm
- Vertical C of G 345mm

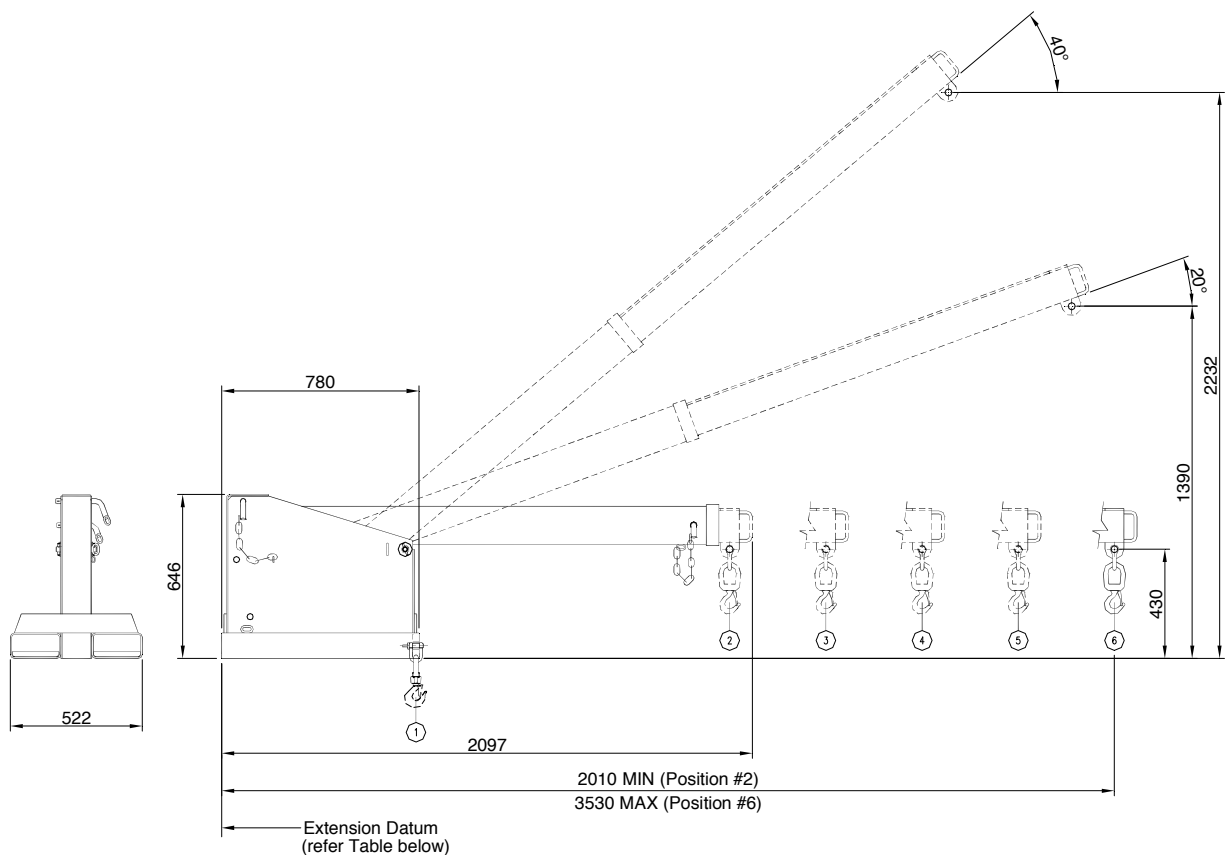

SAFE WORKING LOADS (SWL) PER POSITION						
POSITION	1	2	3	4	5	6
EXTENSION (mm)	770	2010	2390	2770	3150	3530
SWL (kg)	4500	1100	630	470	300	150